



HOSHIZAKI

LEADING NATURALLY




REFRIGERATED SHOWCASE



RICE COOKER TIGER



AUTOMATIC DRAFT BEER DISPENSER

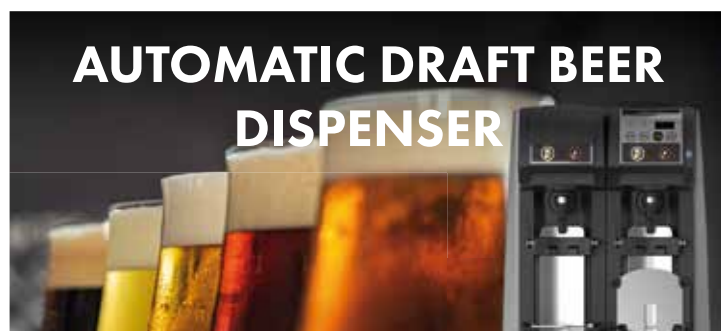

REFRIGERATION



SANITIZING WATER




SUGGESTED PRICE SCHEDULE 2023

Effective February 1st, 2023

Showcases for fish display (Sashimi) and fresh products: the all-Japanese art of displaying fish to assure and highlight its freshness.

All models are available in either black or steel finish, and the condensing unit may be selected in a left-hand side or right-hand side of the cabinet.

**2 YEARS
WARRANTY**
PARTS &
LABOR*

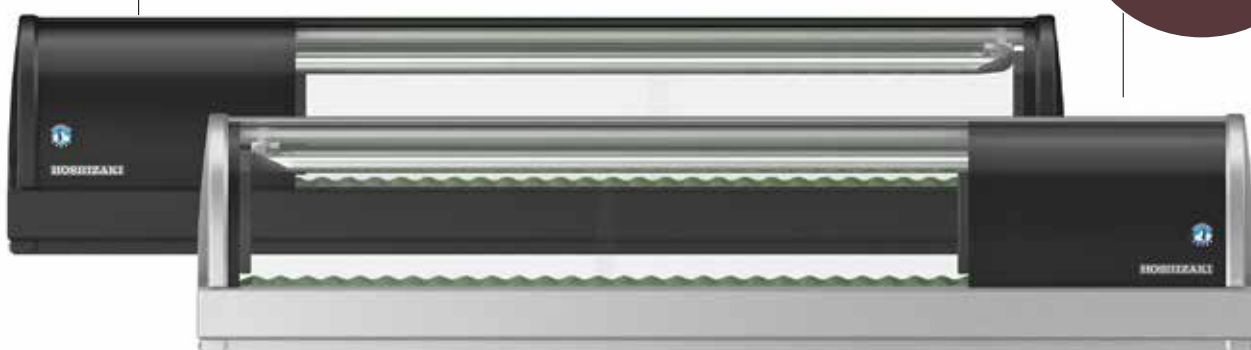



*Country by country agreement

The HNC-range Sashimi showcases, modern and elegant in their design, are conceived and built to highlight and preserve the freshness of even the most delicate fish. The tubular-shaped evaporator featured in the Hoshizaki sashimi refrigerated showcases absorbs heat delicately and continuously. Condensation freezes naturally on its external surface, appearing as a snow-white, eye-appealing frost layer. The continuous flow of refrigerant does not allow the evaporator temperature to raise above freezing temperature. Hence, the frost layer never thaws. Condensation water does not form and never drips on the displayed fish, even during peak serving periods, when the sliding doors of the display cabinet are most frequently open.




General characteristics, featured in all models:

- Stainless steel or black version display case, static refrigeration system, with curved-glass.
- Eight models, available in various widths, from 1.2 m to 2.1 m
- Food plates, undulating-profile, removable and easily cleanable, perfect for sashimi display.



Normal position

Once in reverse position, the elevated side-wings of the trays allow greater cooling of the displayed fish.



- Wide inner depth of 270 mm.
- Sliding doors are easily disassembled and removed for daily cleaning.



- Air-cooled condenser inflow air-louvers positioned on the showcase side facing the Operator, while outflow air-louvers are on the side of the showcase away from the Operator.
- Oversized heat-exchange air-cooled condenser, for improved performance of the refrigeration system.


Easy temperature monitoring

The temperature can be monitored at all times with the visible thermometer inside the display cases.



Easily installed, plug-n-play

The Hoshizaki refrigerated showcases assure the most natural level of humidity and food-safe temperature over their entire period of operation of the refrigeration system. The air-flow created by the refrigeration effect of the evaporator is smooth and diffused, without forced air-circulation, which would cause dehydration and weight-loss, resulting in swift deterioration of the fish or other perishable displayed food.

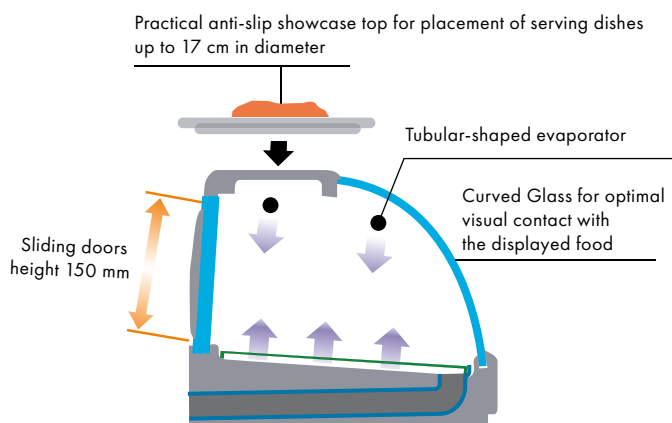

Refrigerated showcases for the display of fresh fish (Sashimi), meat and perishable products.



HNC-120 BE-LB - Condensing Unit on the left-hand side
HNC-120 BE-RB - Condensing Unit on the right-hand side



HNC-150 BE-RB - Condensing Unit on the right-hand side
HNC-150 BE-LB - Condensing Unit on the left-hand side



HNC-180 BE-LB - Condensing Unit on the left-hand side
HNC-180 BE-RB - Condensing Unit on the right-hand side



HNC-210 BE-RB - Condensing Unit on the right-hand side
HNC-210 BE-LB - Condensing Unit on the left-hand side

Sushi case B (black) - HFC R134a

	Item Code	Net capacity	Temperature retention (°C)	Net dimensions (mm)	Crated dimensions (mm)	Electrical supply	Electrical consum. W	Refrigerant	Weight net/gross	Euro
HNC-120 BE - L - B	S051-C172	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	90	R134a/80g	32/44 kg	3.300,00
HNC-120 BE - R - B	S052-C172	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	150	R134a/80g	32/44 kg	3.300,00
HNC-150 BE - L - B	S053-C172	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	150	R134a/110g	37/52 kg	3.520,00
HNC-150 BE - R - B	S054-C172	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	150	R134a/110g	32/52kg	3.520,00
HNC-180 BE - L - B	S055-C172	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	150	R134a/140g	42/58 kg	3.935,00
HNC-180 BE - R - B	S056-C172	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	150	R134a/140g	42/58 kg	3.935,00
HNC-210 BE - L - B	S057-C172	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	150	R134a/160g	47/68 kg	4.335,00
HNC-210 BE - R - B	S058-C172	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	150	R134a/160g	47/68 kg	4.335,00



HNC-120 BE-LB - Condensing Unit on the left-hand side
HNC-120 BE-RB - Condensing Unit on the right-hand side



HNC-150 BE-LB - Condensing Unit on the right-hand side
HNC-150 BE-RB - Condensing Unit on the left-hand side




HNC-180 BE-LB - Condensing Unit on the left-hand side
HNC-180 BE-RB - Condensing Unit on the right-hand side



HNC-210 BE-LB - Condensing Unit on the left-hand side
HNC-210 BE-RB - Condensing Unit on the right-hand side

Sushi case S (stainless steel) - HFC R134a

	Item Code	Net capacity	Temperature retention (°C)	Net dimensions (mm)	Crated dimensions (mm)	Electrical supply	Electrical consum. W	Refrigerant	Weight net/gross	Euro
HNC-120 BE - L - S	S051-C173	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	100	R134a/80g	32/44 kg	3.485,00
HNC-120 BE - R - S	S052-C173	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	100	R134a/80g	32/44 kg	3.485,00
HNC-150 BE - L - S	S053-C173	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	100	R134a/110g	37/52 kg	3.750,00
HNC-150 BE - R - S	S054-C173	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	100	R134a/110g	37/52 kg	3.750,00
HNC-180 BE - L - S	S055-C173	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	125	R134a/140g	45/63 kg	4.245,00
HNC-180 BE - R - S	S056-C173	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	125	R134a/140g	45/63 kg	4.245,00
HNC-210 BE - L - S	S057-C173	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	125	R134a/160g	50/71 kg	4.790,00
HNC-210 BE - R - S	S058-C173	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	125	R134a/160g	50/71 kg	4.790,00



Sushi case B (black) with LED Light - Hydro Carbon R600a

	Item Code	Net capacity	Temperature retention (°C)	Net dimensions (mm)	Crated dimensions (mm)	Electrical supply	Electrical consum. W	Refrigerant	Weight net/gross	Euro
HNC-120 BE - L - BLH	S051-C174	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	3.928 ,00
HNC-120 BE -R- BLH	S052-C174	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	3.928 ,00
HNC-150 BE - L - BLH	S053-C174	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	4.188 ,00
HNC-150 BE -R- BLH	S054-C174	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	4.188 ,00
HNC-180 BE - L - BLH	S055-C174	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	140	R600a /46g	42/60 kg	4.633 ,00
HNC-180 BE -R- BLH	S056-C174	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	140	R600a /46g	42/60 kg	4.633 ,00
HNC-210 BE - L - BLH	S057-C174	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	155	R600a /48g	47/68 kg	5.073 ,00
HNC-180 BE -R- BLH	S058-C174	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	155	R600a /48g	47/68 kg	5.073 ,00



Sushi case B (black) without LED Light - Hydro Carbon R600a

	Item Code	Net capacity	Temperature retention (°C)	Net dimensions (mm)	Crated dimensions (mm)	Electrical supply	Electrical consum. W	Refrigerant	Weight net/gross	Euro
HNC-120 BE - L - BH	S051-C175	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	3.800,00
HNC-120 BE - R - BH	S052-C175	42 liters	+5°C	1200x345x270	1280x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	3.800,00
HNC-150 BE - L - BH	S053-C175	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	4.060,00
HNC-150 BE - R - BH	S054-C175	57 liters	+5°C	1500x345x270	1580x415x517	1/220-240/50Hz	140	R600a /32g	32/44 kg	4.060,00
HNC-180 BE - L - BH	S055-C175	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	140	R600a /46g	42/60 kg	4.505,00
HNC-180 BE - R - BH	S056-C175	72 liters	+5°C	1800x345x270	1880x415x517	1/220-240/50Hz	140	R600a /46g	42/60 kg	4.505,00
HNC-210 BE - L - BH	S057-C175	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	155	R600a /48g	47/68 kg	4.945,00
HNC-210 BE - R - BH	S058-C175	87 liters	+5°C	2100x345x270	2180x415x517	1/220-240/50Hz	155	R600a /48g	47/68 kg	4.945,00

Hoshizaki's rice Cookers: tradition brought to rice cooking.

Rice cooked in a traditional way ... for traditional sushi preparation.
The perfect automatic rice-cooker for any restaurant.
It has a **capacity of 20 cups dry rice (40 cups cooked)** and its stainless steel body makes it durable even against the roughest restaurant conditions.
Includes extra-large rice paddle and measuring cup.



Rice Cooker
JNO-B 36 W

Dimensions cm (W x D x H)
36,0 x 42,6 x 38,3
Weight kg - 8,5



The thick 1.8mm inner pot helps distribute heat evenly and the silicon mat prevents the rice from burning on the bottom.
After the rice finishes cooking, it automatically switches to the keep warm mode.
Rice can be left in the keep warm mode for up to 12 hours.
Includes extra-large rice paddle and measuring cup.

JNO RICE COOKER (3,6 LITERS) (prices per unit)	Item Code	Prices per unit €
JNO Rice Cooker - 1 Euro pallet: 24 units	JNO-B36W	921,00
JNO B36W - 1/2 Euro pallet: 12 units	JNO-B36W	921,00
JNO B36W - less than 18 units	JNO-B36W	921,00



Thermal Heating Tiger JFNO 390 P and JFNO 570 P



Thermal Heating Tiger JFNO 390 P and JFNO 570 P



JFNO 390P

Dimensions cm
(W x D x H)
43,0 x 36,0 x 25,0
Weight 4,3 kg

JFNO 570P

Dimensions cm
(W x D x H)
43,0 x 36,0 x 31,0
Weight 4,8 kg

22 cups (3.9 litres) and **32 cups** (5.7 litres) thermal food warmers will keep food warm with the retention of its own heat **without using any electricity**. Perfect for catering or outdoor events. High thermal insulation is achieved thanks to urethane foam and polystyrene in the lid. Designed to be stacked, thus reducing the kitchen space occupied. The rice inside will be kept at serving temperature and in **fluffy consistency for up to 6 hours**. Excess moisture is absorbed by the steam collector installed on the inner surface of the cover, **preventing rice grains from sticking to each other**.

JFNO 390P Thermal Holder - 22 cups

	Item Code	Prices per unit
JFNO 390P Thermal Holder - 1 Euro pallet: 36 units	JFM-570P	458,00
JFNO 390P Thermal Holder - 1/2 Euro pallet: 18 units	JFM-570P	458,00
JFNO 390P Thermal Holder - less than 18 units	JFM-570P	458,00

JFNO 570P Thermal Holder - 32 cups

	Item Code	Prices per unit
JFNO 570P Thermo Holder - 1 Euro pallet: 36 units	JFM-570P	496,00
JFNO 570P Thermo Holder - 1/2 Euro pallet: 18 units	JFM-570P	496,00
JFNO 570P Thermo Holder - less than 18 units	JFM-570P	496,00

2 YEARS
WARRANTY
PARTS ONLY
EX-WORKS

BEERMATIC

DUAL TAP

Automated Draft beer Dispenser

PERFECTLY
POURED BEER
AT THE TOUCH
OF A BUTTON



IMMEDIATE USE



Unlike traditional drafting systems that require beer kegs to be refrigerated for 24 hours before connecting to the tap, the BEERMATIC cools down each portion individually on its way from the keg into the glass.

EASY TO SET, OPERATE AND CLEAN



**2 YEARS
WARRANTY**
PARTS ONLY



The draft beer dispenser is compatible with glasses of 50 mm or over in inside diameter and 105 mm or less in outside diameter. There must be a difference of 20 mm or over in height between a large size glass and a medium size glass. If you use glasses or tumblers of other sizes, please consult our installation manual.

FUNCTIONAL FEATURES

1. Press once to dispense:

It's as simple as that. Press the dispense button once to draft the preset amount of beer.

2. Tilt-pouring:

The dispense operation is tilting the glass to the right angle to ensure perfectly poured beer.

3. Portion control:

The portion size can be preset to pour the same quantity every time. No overflow of beer or foam.

4. Foam control:

The amount of foam can be set and adjusted for both taps individually.

5. Internal cooling system:

Ambient temperature beer is cooled down as it flows through the beer circuits.

6. Two beer circuits:

This dual-tap model has two circuits, so two different types of beer can be connected and poured simultaneously.

7. Counting/Log Function:

The display shows the number of beers poured. Via the user settings, you can configure the number of beers, based on the volume of your glasses.

8. Automatic or manual dispense mode:

It is a simple process to switch from automatic to manual dispense mode or vice versa via the operation panel.



9. Empty-Keg-Alert:

A "SOLD OUT" lamp lights up in the control panel as soon as there is less than 0.5 liters left in the beer circuit.

DBF-AS65WE-EU-HC

Dimensions (mm)	367 x 674 x 764
Instant Output	-after initial freeze down - 65 ltr. -after 45' recovery time-76 ltr.
Flow Rate, Recovery Time	4 glasses/60" @ 453 ml 10.2 ltr. every 45'
Crated dimensions (mm)	466 x 795 x 858
Crated volume (m³)	0,317
Refrigerant	R600a (80g)



DBF-AS65WE-EU

Dimensions (mm)	367 x 674 x 764
Instant Output	-after initial freeze down - 65 ltr. -after 45' recovery time-76 ltr.
Flow Rate, Recovery Time	4 glasses/60" @ 453 ml 10.2 ltr. every 45'
Crated dimensions (mm)	466 x 795 x 858
Crated volume (m³)	0,317
Refrigerant	R134a-CO2 eq: 175 g



Model	Item Code	Refrigerant system	Electrical connection	Electrical Consumption 24h (W)	Net/Gross Weight (kg)	Euro
DBF-AS65WE-EU-HC	B078-C101	Air cooled	220-240/50/1	245	50/57	t.b.d.
DBF-AS65WE-EU	B078-D011	Air cooled	220-240/50/1	285	50/56	8.920,00

1PREMIER SERIES

The all new range of **energy efficient cabinets**
for the professional kitchen from Hoshizaki.



GRAM

PREMIER 70

**5 YEAR
WARRANTY**
PARTS ONLY



2/1 GN



HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Automatic door closing
- Pedal door opener with safety release
- 4 grey shelves (530 x 650mm)
- LED lighting
- Door lock
- Legs, H = 130-180mm

	PREMIER K 70 L DR	PREMIER M 70 L DR	PREMIER F 70 L DR	PREMIER KG 70 L DR
Item number	171701010	172701010	173701010	174701010
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (l)	700	700	700	700
Net usable volume (l)	475	475	475	475
Outside dimensions W x D x H	690 x 920 x 2100	690 x 920 x 2100	690 x 920 x 2100	690 x 920 x 2100
Weight (kg)	125	125	125	130
Weight, packed (kg)	135	135	135	140
Refrigeration capacity at -10°C	206 W (-10° / +45°)	206 W (-10° / +45°)	-	206 W (-10° / +45°)
Refrigeration capacity at -25°C	-	-	376 W (-30° / +45°)	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	460	120
Energy efficiency class	A	A	C	B
Energy consumption (kWh/24h)	0,935	0,935	4,853	1,237
Sound level db(A)	48	48	52	48
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	22	22	22	22
	€ 4.720	€ 4.770	€ 5.250	€ 6.390

760660009	Shelf grey with back guard for gn2/1 cabinets excl. Rail	€ 60
760660013	Shelf ss with back guard for gn2/1 cabinets excl. Rail	€ 119
760660442	Shelf grey for gn2/1 cabinets excl. Rail (bottom)	€ 65
760660437	Shelf ss with back guard for gn2/1 cabinets excl. Rail (bottom)	€ 119
760660444	Set of shelves (3 top+1 bottom) ss with back guard for gn2/1 cabinets excl. Rail (single door)	€ 470
760660118	Set of 4 stainless legs 130-180 mm	€ 84
760660022	Set of 4 castors for cabinets	€ 110
760660430	Master key	€ 10

1PREMIER
SERIES

PREMIER 140

**5 YEAR
WARRANTY**
PARTS ONLY



2/1 GN

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- 1 right hand and 1 left hand hinged door
- Automatic door closing
- Door lock x 2
- Pedal door opener x 2
- 8 grey shelves (530 x 650mm)
- LED lighting
- Legs, H = 130-180mm
- Complete wall rails, Shelf support.



	PREMIER K 140 L	PREMIER M 140 L	PREMIER F 140 L	PREMIER KG 140 L
Item number	171141070	172141070	173141070	174141070
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (l)	1400	1400	1400	1400
Net usable volume (l)	1085	1085	1085	1085
Outside dimensions W x D x H (mm)	1380 x 920 x 2100	1380 x 920 x 2100	1380 x 920 x 2100	1380 x 920 x 2100
Weight (kg)	196	196	196	215
Weight, packed (kg)	212	212	212	230
Refrigeration capacity at -10°C	361 W (-10° / +45°)	361 W (-10° / +45°)	-	361 W (-10° / +45°)
Refrigeration capacity at -25°C	-	-	608 W (-30° / +45°)	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	200	200	920	200
Energy efficiency class	A	A	C	B
Energy consumption (kWh/24h)	1,622	1,622	8,89	2,26
Sound level db(A)	50	50	56	50
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R290	R290	R290	R290
Number of shelves	8	8	8	8
Maximum number of shelves	22 x 2	22 x 2	22 x 2	22 x 2
	€ 7.750	€ 7.980	€ 8.310	€ 10.900

760660009	Shelf grey with back guard for gn2/1 cabinets excl. Rail	€ 60
760660013	Shelf ss with back guard for gn2/1 cabinets excl. Rail	€ 119
760660442	Shelf grey for gn2/1 cabinets excl. Rail (bottom)	€ 65
760660437	Shelf ss with back guard for gn2/1 cabinets excl. Rail (bottom)	€ 119
760660445	Set of shelves (6 top+2 bottom) ss with back guard for gn2/1 cabinets excl. Rail (double door)	€ 940
760660243	Double door cabinet rail-left gn2/1 u shape	€ 14
760660244	Double door cabinet rail-right gn2/1 u shape	€ 14
760660118	Set of 4 stainless legs 130-180 mm	€ 84
760660022	Set of 4 castors for cabinets	€ 110
760660430	Master key	€ 10

1PREMIER
SERIES

PREMIER W80

**5 YEAR
WARRANTY**
PARTS ONLY



2/1 GN



HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Automatic door closing
- Pedal door opener with safety release
- 4 grey shelves (650 x 530mm)
- LED lighting
- Door lock
- Legs, H = 130-180mm

	PREMIER K W80 L DR	PREMIER M W80 L DR	PREMIER F W80 L DR	PREMIER KG W80 L DR
Item number	171801010	172801010	173801010	174801010
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (l)	700	700	700	700
Net usable volume (l)	475	475	475	475
Outside dimensions W x D x H	810 x 800 x 2100	810 x 800 x 2100	810 x 800 x 2100	810 x 800 x 2100
Weight (kg)	125	125	125	130
Weight, packed (kg)	135	135	135	140
Refrigeration capacity at -10°C	206 W (-10° / +45°)	206 W (-10° / +45°)	-	206 W (-10° / +45°)
Refrigeration capacity at -25°C	-	-	376 W (-30° / +45°)	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	520	120
Energy efficiency class	A	A	C	B
Energy consumption (kWh)	0,925	0,925	4,87	1,204
Sound level db(A)	48	48	52	48
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	18	18	18	18
	€ 5.150	€ 5.230	€ 5.330	€ 6.650

	ACCESSOIRES	
760660433	Shelf grey with back guard for gn2/1 wide cabinets excl. Rail	€ 65
760660438	Shelf ss with back guard for gn 2/1 wide cabinet excl. Rail	€ 119
760660443	Shelf grey for gn2/1 wide cabinets excl. Rail (bottom)	€ 67
760660439	Shelf ss with back guard for gn 2/1 wide cabinet excl. Rail (bottom)	€ 119
760660447	Set of shelves (3 top+1 bottom) ss with back guard for gn2/1 wide cabinets excl. Rail	€ 470
760660118	Set of 4 stainless legs 130-180 mm	€ 84
760660022	Set of 4 castors for cabinets	€ 110
760660430	Master key	€ 10

1PREMIER
SERIES

PREMIER 60

**5 YEAR
WARRANTY**
PARTS ONLY

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Right hand hinged reversible door
- Automatic door cloosing
- Pedal door opener with safety release
- 4 grey shelves (400 x 600mm)
- LED lighting
- Door lock
- Legs, H = 130-180mm
- Complete wall rails, Shelf support



1/1 EN



A



A



C



B

	PREMIER K 60 L DR	PREMIER M 60 L DR	PREMIER F 60 L DR	PREMIER KG 60 L DR
Item number	171601010	172601010	173601010	174601010
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (l)	480	480	480	480
Net usable volume (l)	335	335	335	335
Outside dimensions W x D x H	610 x 920 x 2100	610 x 920 x 2100	610 x 920 x 2100	610 x 920 x 2100
Weight (kg)	110	110	110	115
Weight, packed (kg)	120	120	120	125
Refrigeration capacity at -10°C	206 W (-10° / +45°)	206 W (-10° / +45°)	-	206 W (-10° / +45°)
Refrigeration capacity at -25°C	-	-	376 W (-30° / +45°)	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	310	120
Energy efficiency class	A	A	C	B
Energy consumption (kWh/24h)	0,785	0,785	4,13	1,023
Sound level db(A)	46	46	51	46
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	22	22	22	22
	€ 5.020	€ 5.080	€ 5.180	€ 6.500

760660431	Shelf grey with back guard for en1/1 cabinet excl. Rail	€ 50
760660440	Shelf ss with back guard for en1/1 cabinet excl. Rail	€ 125
760660446	Set of shelves (4 shelves) ss with back guard for en 1/1 cabinets excl. Rail	€ 490
760660432	Set of 2 rail for en1/1 cabinet u shape	€ 20
760660118	Set of 4 stainless legs 130-180 mm	€ 84
760660022	Set of 4 castors for cabinets	€ 110
760660430	Master key	€ 10

1PREMIER
SERIES

PREMIER BW80

**5 YEAR
WARRANTY**
PARTS ONLY



2/1 GN



A



A



C



B

HIGHLIGHTS

- Removable gaskets
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Automatic door closing
- Integrated castors
- 4 shelves (650 x 530mm)
- LED lighting
- Door lock
- Complete wall rails, Shelf support

	PREMIER K BW80 DR	PREMIER M BW80 DR	PREMIER F BW80 DR	PREMIER KG BW80 DR
Item number	171800010	172800010	173800010	174800010
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (l)	610	610	610	610
Net usable volume (l)	457	457	457	457
Outside dimensions W x D x H	830 x 770 x 1970	830 x 770 x 1970	830 x 770 x 1970	830 x 770 x 1970
Weight (kg)	130	130	130	135
Weight, packed (kg)	140	140	140	145
Refrigeration capacity at -10°C	206 W (-10° / +45°)	206 W (-10° / +45°)	-	206 W (-10° / +45°)
Refrigeration capacity at -25°C	-	-	376 W (-30° / +45°)	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	370	120
Energy efficiency class	A	A	C	B
Energy consumption (kWh/24h)	0,911	0,911	4,959	1,184
Sound level db(A)	48	48	51	48
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	22	22	22	22
	€ 5.530	€ 5.590	€ 5.870	€ 7.080

760660433	Shelf grey with back guard for gn2/1 wide cabinets excl. Rail	€ 65
760660438	Shelf ss with back guard for gn 2/1 wide cabinet excl. Rail	€ 119
760660448	Set of shelves (4 shelves) ss with back guard for gn 2/1 wide cabinets excl. Rail	€ 470
760660434	Set of 2 rail for bottom mount cabinets u shape	€ 32
760660430	Master key	€ 10

1PREMIER
SERIES

→ ADVANCE SERIES

The all new range of **energy efficient cabinets**
for the professional kitchen from Hoshizaki.



GRAM

ADVANCE 70

**3 YEAR
WARRANTY**
PARTS ONLY



2/1 GN



ADVANCE K 70-4 L DR

Item number	131701010
Temperature range	+0°C/+10°C
Volume, gross (l)	600
Net usable volume (l)	415
Outside dimensions W x D x H	654 x 830 x 2000
Weight (kg)	123
Weight, packed (kg)	133
Refrigeration capacity at -10°C	425 W (-30° / +45°)
Refrigeration capacity at -25°C	-
Connection	230V / NPE 50 Hz
Connection load (Watt)	140
Energy efficiency class	C
Energy consumption (kWh/24h)	1,50
Sound level db(A)	54
Climate class	5
GWP	3
Refrigerant	R290
Number of shelves	4
Maximum number of shelves	22

€ 2.940

ADVANCE F 70-4 L DR

Item number	133701010
Temperature range	-25°C/-12°C
Volume, gross (l)	600
Net usable volume (l)	420
Outside dimensions W x D x H	654 x 830 x 2000
Weight (kg)	123
Weight, packed (kg)	133
Refrigeration capacity at -10°C	-
Refrigeration capacity at -25°C	606 W (-30° / +45°)
Connection	230V / NPE 50 Hz
Connection load (Watt)	650
Energy efficiency class	D
Energy consumption (kWh/24h)	5,949
Sound level db(A)	56
Climate class	5
GWP	3
Refrigerant	R290
Number of shelves	4
Maximum number of shelves	22

€ 3.330

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Door lock
- Automatic door closing
- 4 grey shelves (650 x 530 mm)
- LED lighting
- Legs, H = 130-180mm
- Interior/ Exterior:
AISI 430 stainless steel

760660009	Shelf grey with back guard for gn2/1 cabinets excl. Rail	€ 60
760660013	Shelf ss with back guard for gn2/1 cabinets excl. Rail	€ 119
760660442	Shelf grey for gn2/1 cabinets excl. Rail (bottom)	€ 65
760660437	Shelf ss with back guard for gn2/1 cabinets excl. Rail (bottom)	€ 119
760660444	Set of shelves (3 top+1 bottom) ss with back guard for gn2/1 cabinets excl. Rail (single door)	€ 470
760660118	Set of 4 stainless legs 130-180 mm	€ 84
760660022	Set of 4 castors for cabinets	€ 110
760660430	Master key	€ 10

ADVANCE 140

**3 YEAR
WARRANTY**
PARTS ONLY



2/1 GN



ADVANCE K 140-4 L

Item number	131141070
Temperature range	+0°C/+10°C
Volume, gross (l)	1200
Net usable volume (l)	797
Outside dimensions W x D x H	1344 x 830 x 2000
Weight (kg)	177
Weight, packed (kg)	192
Refrigeration capacity at -10°C	632 W (-30° / +45°)
Refrigeration capacity at -25°C	-
Connection	230V / NPE 50 Hz
Connection load (Watt)	270
Energy efficiency class	C
Energy consumption (kWh/24h)	2,54
Sound level db(A)	53
Climate class	5
GWP	3
Refrigerant	R290
Number of shelves	8
Maximum number of shelves	22 x 2

€ 4.980

ADVANCE F 140-4 L

Item number	133141070
Temperature range	-25°C/-12°C
Volume, gross (l)	1200
Net usable volume (l)	797
Outside dimensions W x D x H	1344 x 830 x 2000
Weight (kg)	177
Weight, packed (kg)	192
Refrigeration capacity at -10°C	-
Refrigeration capacity at -25°C	673 W (-30° / +45°)
Connection	230V / NPE 50 Hz
Connection load (Watt)	700
Energy efficiency class	D
Energy consumption (kWh/24h)	10,60
Sound level db(A)	58
Climate class	5
GWP	3
Refrigerant	R290
Number of shelves	8
Maximum number of shelves	22 x 2

€ 5.370

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- 1 right hand and 1 left hand hinged door
- Door lock
- Automatic door closing
- 8 grey shelves (650 x 530 mm)
- LED lighting
- Legs, H = 130-180mm
- Complete wall rails, Shelf support.
- Interior/ Exterior: AISI 430 stainless steel

760660009	Shelf grey with back guard for gn2/1 cabinets excl. Rail	€ 60
760660013	Shelf ss with back guard for gn2/1 cabinets excl. Rail	€ 119
760660442	Shelf grey for gn2/1 cabinets excl. Rail (bottom)	€ 65
760660437	Shelf ss with back guard for gn2/1 cabinets excl. Rail (bottom)	€ 119
760660445	Set of shelves (6 top+2 bottom) ss with back guard for gn2/1 cabinets excl. Rail (double door)	€ 940
760660243	Double door cabinet rail-left gn2/1 u shape	€ 14
760660244	Double door cabinet rail-right gn2/1 u shape	€ 14
760660118	Set of 4 stainless legs 130-180 mm	€ 84
760660022	Set of 4 castors for cabinets	€ 110
760660430	Master key	€ 10



GREAT VARIETY TO SUIT INDIVIDUAL NEEDS



MEETING THE NEEDS OF DIVERSE KITCHENS

The COMFORT series fits into all segments of the hospitality and the food service industry. One of the reasons is the wide span of models for different usage areas and purposes. The series can accommodate the most diverse of needs, especially when it comes to capacity and functionalities.

- ✓ Ideal for commercial kitchens
(Front of House / Back of House)
- ✓ Suitable for use in ambient temperatures of up to +40°C (tropical)
- ✓ Heavy Duty cabinets: Climate class 5
- ✓ High performance, ensuring temperature stability despite frequent door openings
- ✓ Gastronorm compatible cabinets and under counters (partly)

LEGS OR CASTORS



Castors (standard): 124 mm
Legs (optional): 150-170 mm.

TEMPERATURE RANGES STORAGE CABINETS

R -2/+12°C	F -25/-7°C	R -2/+12°C
Refrigerator	Freezer	F -23/-16°C
		Combi refrigerator/ freezer


TEMPERATURE RANGES UNDERCOUNTER STORAGE

R -2/+12°C	F -23/-7°C
Refrigerator	Freezer

SNOWFLAKE COMFORT

KEY FEATURES

FOOD SAFE AND VERSATILE




SELF-CLOSING DOOR

Automatic door closing is a practical feature and helps reducing energy consumption. With an angle of more than 90° the door will stay open.




ELECTRONIC CONTROLLER

Easy to use digital controller concealed behind transparent panel, protected against splashing water. Easy to read of temperature also from the distance.




REPLACEABLE DOOR GASKET

The door sealing gasket keeps the cold air in the cabinet/counter. For cleaning or replacement it can be easily removed without the use of tools. Simple and hygienic.



FUNCTIONAL DESIGN

Full-height handle integrated into the door, ergonomic in use and easy to keep clean.



AUTOMATIC EVAPORATION OF DEFROST WATER

The drip tray has a heating element that evaporates defrost water.


USAGE AREAS



Catering Healthcare* Education Hospitality Leisure

*Food storage only, not for bio-medical purposes

GREAT VARIETY




The Snowflake Comfort range offers a wide variety of models. Various sizes, exterior options, temperature ranges, GN compatibilities, electrical supplies (50 and 60Hz), door/drawer combinations are just some of the configuration possibilities.

COMPATIBLE SOLUTIONS




Both the cabinet and counter series offer GN compatible product configurations. See the product section for details.

FOOD SAFE



High duty cabinets and counters classified in climate class 5. Snowflake Comfort is designed to endure operation in ambient temperatures of 40°C with 40% relative humidity (RH).

HIGH STANDARD IN HYGIENE




















Designed for easy cleaning with smooth surfaces throughout. Specific features are highlighted above.

GREAT VARIETY












THE RIGHT SOLUTION FOR THE RIGHT JOB

STORAGE CABINETS






















































HRW-77	 Standard Full Door	 Optional Half Doors	 Optional Top Glass Half Doors	 Standard Door GN Compatible
HFW-77	 Standard Full Door	 Optional Half Doors	 Standard Door GN Compatible	
HREW-77	 Half Doors			
HRW-147 & 127	 Standard Full Door	 Optional Half Doors	 Optional Top Glass Half Doors	 Standard Door GN Compatible*
HFW-147 & 127	 Standard Full Door	 Optional Half Doors	 Standard Door GN Compatible**	
HREW-127	 Standard Full Door	 Optional Half Doors		

*: HRW-147 model only
**: HFW-147 model only

UNDERCOUNTER STORAGE

RTW-70	 Standard Door	 Optional Glass Door	 Optional Top with 50/100/150 mm Splash Back
FTW-70	 Standard Door	 Optional Top with 50/100/150 mm Splash Back	
RTDW-137 & 187	 2 Sections equipped with 4 drawers	 2 Sections equipped with 6 drawers	 Optional Drawer/Door Combinations
	 3 Sections equipped with 6 drawers	 3 Sections equipped with 9 drawers	 Optional Drawer/Door Combinations

UNDERCOUNTER STORAGE

RTW-126, 120 & 127GN								
	Standard Model with Full Doors	RTW 127 GN Compatible	Optional Glass Doors	Optional Top with 50/100/150 mm Splash Back	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)
								
	Standard Model with Full Doors	FTW 127 GN Compatible	Optional Top with 50/100/150 mm Splash Back	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)
								
	Standard Model with Full Doors	Optional Glass Doors	Optional Top with 50/100/150 mm Splash Back	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)
								
	Standard Model with Full Doors	Optional Top with 50/100/150 mm Splash Back	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)
RTW-186, 180 & 177GN								
	Standard Model with Full Doors	RTW 177 GN Compatible	Optional Glass Doors	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)
								
	Standard Model with Full Doors	FTW 177 GN Compatible	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)
								
	Standard Model with Full Doors	FTW 177 GN Compatible	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)
	Standard Model with Full Doors	FTW 177 GN Compatible	Optional Prep Top (Single Row)	Optional Prep Top (Double Row)	Optional Prep Top w/SB (Single Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)	Optional Prep Top w/SB (Double Row)

Refrigerated Storage Cabinets



HRW-77LS4-LDGN
HRW-77BLS4-LDGN



HRW-77LS4-LGGN
HRW-77BLS4-LGGN



HFW-77LS4-LDGN
HFW-77BLS4-LDGN



HRFW-77LS4-GN
Refrigerator (Bottom)/Freezer (Top)

PRODUCT NAME – 50Hz	HRW-77LS4-LDGN	HRW-77LS4-LGGN	HFW-77LS4-LDGN	HRFW-77LS4-GN
PRODUCT NAME – 60Hz	HRW-77BLS4-LDGN	HRW-77BLS4-LGGN	HFW-77BLS4-LDGN	–
Item Code – 50Hz	W81110001	W81110107	W81210001	W81310001
Item Code – 60Hz	W81111001	W81111101	W81211001	–
Temperature Range	-2/+12 °C	-2/+12 °C	-25/-7 °C	Refrigerator: -2/+12 °C Freezer: -23/-16 °C
PRICE	€2.455,00 / 2.725,00	€2.670,00/-	€2.990,00 / 3.325,00	€4.080,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

Also available as:



HRW-77LS4-GN
1/2 Door cabinet
2 shelves per section



HFW-77LS4-GN
1/2 Door cabinet.
2 Shelves per section

TECHNICAL DATA	HRW-77LS4-LDGN HRW-77BLS4-LDGN	HRW-77LS4-LGGN HRW-77BLS4-LGGN	HFW-77LS4-LDGN HFW-77BLS4-LDGN	HRFW-77LS4-GN
Internal Volume (gross)	628 Ltr	628 Ltr	628 Ltr	Refrigerator: 305 Ltr Freezer: 305 Ltr
Internal Volume (net)	572 Ltr	572 Ltr	572 Ltr	Refrigerator: 285 Ltr Freezer: 257 Ltr
Dimensions (W x D x H) (incl. castors 124 mm)	700 x 818 x 2024 mm	700 x 818 x 2024 mm	700 x 818 x 2024 mm	700 x 818 x 2024 mm
Electrical Supply	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2 °C ambient and 65% RH	50Hz: 4.00 kWh 60Hz: 4.82 kWh	50Hz: 4.10 kWh 60Hz: 4.51 kWh	50Hz: 10.78 kWh 60Hz: 9.74 kWh	9.20 kWh
Weight Gross/Net (incl. castors)	141/121 kg	145/121 kg	152/132kg	137/161 kg
Shelf Dimensions (W x D)	570 x 625 mm (4 supplied)	570 x 625 mm (4 supplied)	570 x 625 mm (4 supplied)	570 x 625 mm (4 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Shelf Fittings, 2/1 GN Deep	GN Rails as standard	GN Rails as standard	GN Rails as standard	GN Rails as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	50Hz: 330W 60Hz: 380W	50Hz: 370W 60Hz: 410W	50Hz: 700W 60Hz: 780W	625W
Refrigerant	R134a	R134a	R404A	R404A
LED Light	Yes	Yes	Yes	Yes
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Door options	-	-	-	-
Door lock	Standard	Standard	Standard	

*): Information not yet available

Refrigerated Storage Cabinets



HRW-77LS4-HGGN



HRW-147LS4-LDGN
HRW-147BLS4-LDGN



HFW-147LS4-LDGN
HFW-147BLS4-LDGN



HRW-147LS4-HGGN

PRODUCT NAME – 50Hz	HRW-77LS4-HGGN	HRW-147LS4-LDGN	HFW-147LS4-LDGN	HRW-147LS4-HGGN
PRODUCT NAME – 60Hz		HRW-147BLS4-LDGN	HFW-147BS4-LDGN	
Item Code – 50Hz	W81110104	W81110002	W81210002	W81110103
Item Code – 60Hz	-	W81111002	W81211002	-
Temperature Range	-2/+12 °C	-2/+12 °C	-25/-7 °C	-2/+12 °C
PRICE	€2.850,00	€3.420,00 / 3.760	€3.860,00 / 4.245,00	€ 4.190,00

MATERIAL

Interior/Exterior

Stainless Steel SS 430

Stainless Steel SS 430

Stainless Steel SS 430

Stainless Steel SS 430

Also available as:



HRW-147LS4-GN
1/2 Door cabinet
2 shelves per section



HFW-147LS4-GN
1/2 door option available.
2 Shelves per section.

TECHNICAL DATA	HRW-77LS4-HGGN	HRW-147LS4-LDGN HRW-147BLS4-LDGN	HFW-147LS4-LDGN HFW-147BLS4-LDGN	HRW-147LS4-HGGN
Internal Volume (gross)	Top section: 314 Ltr Bottom section: 314 Ltr	1365 Ltr	1365 Ltr	1365 Ltr
Internal Volume (net)	Top section: 286 Ltr Bottom section: 286 Ltr	1278 Ltr	1278 Ltr	1272 Ltr
Dimensions (W x D x H) (incl. castors 124 mm)	700 x 818 x 2024 mm	1400 x 818 x 2024 mm	1400 x 818 x 2024 mm	1400 x 818 x 2024 mm
Electrical Supply	230V, 50Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	4,0 kWh	50Hz: 8.26 kWh 60Hz: 9.24 kWh	50Hz: 18.48 kWh 60Hz: 21.20 kWh	7,51 kWh
Weight Gross/Net (incl. castors)	143/123 kg	221/186 kg	229/189 kg	225/190 kg
Shelf Dimensions (W x D)	570 x 625 mm (4 supplied, 2 per section)	630 x 625 mm (8 supplied, 4 per section)	630 x 625 mm (8 supplied, 4 per section)	630 x 625 mm (8 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Shelf Fittings, 2/1 GN Deep	GN Rails as standard	GN Rails as standard	GN Rails as standard	GN Rails as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	330W	50Hz: 680W 60Hz: 710W	50Hz: 1100W 60Hz: 1100W	awaiting value
Refrigerant	R134a	R134A	R404A	R134A
LED Light	Yes	Yes	Yes	Yes
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Door Options	-	Full doors (Standard) Half doors (Optional) Half glass doors (Optional)	Full doors (Standard) Half doors (Optional)	Full doors (Standard) Half doors (Optional)
Door lock	Standard	Standard	Standard	Standard

Refrigerated Storage Cabinets



HRW-127LS4-LD



HRW-127LS4-LG



HFW-127LS4-LD



HRFW-127LS4-LD
Refrigerator (left) / Freezer (right)

PRODUCT NAME	HRW-127LS4-LD	HRW-127LS4-LG	HFW-127LS4-LD	HRFW-127LS4-LD
Item Code	W81120003	W81120101	W81220002	W81320001
Temperature Range	-2/+12 °C	-2/+12 °C	-25/-7 °C	Refrigerator: -2/+12 °C Freezer: -25 °C/-7 °C
PRICE	€ 3.060,00	€3.435,00	€3.815,00	€4.810,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430
Also available as:				



HRW-127LS4

1/2 Door option available.
2 Shelves per section.



HFW-127LS4

1/2 Door cabinet.
2 Shelves per section.



HRFW-127LS4

Left Section: Refrigerator
Right Section: Freezer

TECHNICAL DATA	HRW-127LS4-LD	HRW-127LS4-LG	HFW-127LS4-LD	HRFW-127LS4-LD
Internal Volume (gross)	1119 Ltr	1119 Ltr	1119 Ltr	Refrigerator: 510 Ltr Freezer: 510 Ltr
Internal Volume (net)	1042 Ltr	1042 Ltr	1042 Ltr	Refrigerator: 472 Ltr Freezer: 472 Ltr
Dimensions (W x D x H) (Incl. Castors 124 mm)	1200 x 818 x 2024 mm	1200 x 818 x 2024 mm	1200 x 818 x 2024 mm	1200 x 818 x 2024 mm
Electrical Supply	230V, 50Hz	230V, 50Hz	230V, 50Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2 °C ambient and 65% RH	6.9 kWh	7.61 kWh	18.05 kWh	Refrigerator: 2.36 kWh Freezer: 10.43 kWh
Weight Gross/Net (incl. castors)	197/162 kg	202/174 kg	203/168 kg	233/198 kg
Shelf Dimensions (W x D)	520 x 615 mm (8 supplied, 4 per section)	520 x 615 mm (8 supplied, 4 per section)	520 x 615 mm (8 supplied, 4 per section)	468 x 615 mm (8 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard)	White (Standard), Stainless Steel (Optional)
Shelf Fittings	Clips as standard	Clips as standard	Clips as standard	Clips as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	680W	690W	1100W	Refrigerator: 310W Freezer: 700W
Refrigerant	R134a	R134a	R404A	R134a/R404A
LED Light	Yes	Yes	Yes	Yes
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Door Options	–	Full glass doors (Standard)	–	–
Door lock	Standard	Not available	Standard	Standard

*): Information not yet available

Refrigerated Undercounter Storage



RTW-70MS4
RTW-70BS4



RTW-70LS4-GD
RTW-70BLS4-GD



FTW-70MS4
FTW-70BS4

PRODUCT NAME – 50Hz	RTW-70MS4	RTW-70LS4-GD	FTW-70MS4
PRODUCT NAME – 60Hz	RTW-70BS4	RTW-70BLS4-GD	FTW-70BS4
Item Code – 50Hz	W86120010	W86120108	W86220010
Item Code – 60Hz	W86121001	W86121101	W86221001
Temperature Range	-2/+12 °C	-2/+12 °C	-23/-7 °C
PRICE	€1.745,00 / 2.080,00	€1.900,00 / *	€1.955,00 / 2.325,00
MATERIAL			
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	RTW-70MS4 RTW-70BS4	RTW-70LS4-GD RTW-70BLS4-GD	FTW-70MS4 FTW-70BS4
Internal Volume (gross)	171 Ltr	171 Ltr	171 Ltr
Internal Volume (net)	148 Ltr	148 Ltr	148 Ltr
Dimensions (W x D x H) (incl. castors 124 mm)	700 x 755 x 824 mm	700 x 755 x 824 mm	700 x 755 x 824 mm
Electrical Supply	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz
Energy Consumption (kWh/24h) at 32.2 °C ambient and 65% RH	50Hz: 2.91 kWh 60Hz: 2.22 kWh	50Hz: 3.44 kWh 60Hz: 2.73 kWh	50Hz: 6.40 kWh 60Hz: 5.70 kWh
Weight Gross/Net (incl. castors)	80/64 kg	84/68 kg	86/70 kg
Shelf Dimensions (W x D), compatible	Bottom Shelf: 561 x 297 mm Top Shelf: 561 x 554 mm	Bottom Shelf: 561 x 297 mm Top Shelf: 561 x 554 mm	Bottom Shelf: 561 x 297 mm Top Shelf: 561 x 554 mm
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	50Hz: 220W 60Hz: 240W	50Hz: 220W 60Hz: 240W	50Hz: 280W 60Hz: 360W
Refrigerant	R134a	R134a	R404A
LED Light	Optional = Model LS4	Standard	Optional = Model LS4
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional
Door lock	Standard	Standard	Standard

*): Information not yet available

Refrigerated Undercounter Storage



RTW-127MS4-GN
RTW-127BS4-GN



FTW-127MS4-GN
FTW-127BS4-GN



RTDW137MS4-22
RTDW137BS4-22



RTDW-137MS4-33
RTDW-137BS4-33

PRODUCT NAME – 50Hz	RTW-127MS4-GN	FTW-127MS4-GN	RTDW137MS4-22	RTDW137MS4-33
PRODUCT NAME – 60Hz	RTW-127BS4-GN	FTW-127BS4-GN	RTDW137BS4-22	RTDW137BS4-33
Item Code – 50Hz	W86110001	W86210001	W87110001	W87110002
Item Code – 60Hz	W86111003	W86211003	W87111001	W87111004
Temperature Range	-2/+12 °C	-23/-7 °C	-2/+12 °C	-2/+12 °C
PRICE	€2.160,00 / 2.160,00	€2.440,00 / 2.635,00	€3.335,00 / 3.705,00	€4.135,00 / 4.135,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	RTW-127MS4-GN RTW-127BS4-GN	FTW-127MS4-GN FTW-127BS4-GN	RTDW137MS4-22 RTDW137BS4-22	RTDW-137MS4-33 RTDW-137BS4-33
Internal Volume (gross)	282 Ltr	282 Ltr	305 Ltr	305 Ltr
Internal Volume (net)	262 Ltr	262 Ltr	212 Ltr	212 Ltr
Dimensions (W x D x H) (Incl. Castors 124 mm)	1200 x 700 x 824 mm	1200 x 700 x 824 mm	1300 x 700 x 824 mm	1300 x 700 x 824 mm
Electrical Supply	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	50Hz: 3.23 kWh 60Hz: 3.02 kWh	50Hz: 9.23 kWh 60Hz: 10.75 kWh	50Hz: 3.26 kWh 60Hz: 2.16 kWh	50Hz: 3.26 kWh 60Hz: 2.16 kWh
Weight Gross/Net (incl. castors)	121/106 kg	121/106 kg	144/121 kg	144/121 kg
Drawer External Dimensions W x H, GN compatible	–	–	445 x 304 mm	455 x 195 mm
Shelf Dimensions (W x D)	325 x 522 mm (4 supplied, 2 per section)	325 x 522 mm (4 supplied, 2 per section)	–	–
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Options)	–	–
Shelf Fittings	GN Rails as standard, 1/1 GN Deep	GN Rails as standard, 1/1 GN Deep	–	–
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	50Hz: 280W 60Hz: 300W	50Hz: 610W 60Hz: 590W	50Hz: 308W 60Hz: 380W	50Hz: 308W 60Hz: 380W
Refrigerant	R134a	R404A	R134a	R134a
LED Light	Optional = Model LS4-GN	Optional = Model LS4-GN	Not Applicable	Not Applicable
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional	Optional
Drawer/Door Combination	–	–	RTDW-137MS4-D2 (€ 2.530) RTDW-137MS4-2D (€ 2.530)	RTDW-137MS4-D3 (€ 2.775) RTDW-137MS4-3D (€ 2.775)
Door lock	Standard	Standard	Optional	Optional

*): Information not yet available

Refrigerated Undercounter Storage



RTW-177MS4-GN
RTW-177BS4-GN



FTW-177MS4-GN
FTW-177BS4-GN



RTDW-187MS4-222
RTDW-187BS4-222



RTDW-187MS4-333
RTDW-187BS4-333

PRODUCT NAME – 50Hz	RTW-177MS4-GN	FTW-177MS4-GN	RTDW-187MS4-222	RTDW-187MS4-333
PRODUCT NAME – 60Hz	RTW-177BS4-GN	FTW-177BS4-GN	RTDW-187BS4-222	RTDW-187BS4-333
Item Code – 50Hz	W86110002	W86210002	W87110003	W87110004
Item Code – 60Hz	W86111002	W86211002	W87111007	W87111011
Temperature Range	-2/+12 °C	-23/-7 °C	-2/+12 °C	-2/+12 °C
PRICE	€2.870,00 / 2.870,00	€3.100,00 / 3.100,00	€4.490,00 / 4.490,00	€ 5.510,00 / 5.510,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	RTW-177MS4-GN RTW-177BS4-GN	FTW-177MS4-GN FTW-177BS4-GN	RTDW-187MS4-222 RTDW-187BS4-222	RTDW-187MS4-333 RTDW-187BS4-333
Internal Volume (gross)	436 Ltr	436 Ltr	461 Ltr	461 Ltr
Internal Volume (net)	408 Ltr	408 Ltr	318 Ltr	318 Ltr
Dimensions (W x D x H) (Incl. Castors 124 mm)	1660 x 700 x 824 mm	1660 x 700 x 824 mm	1765 x 700 x 824 mm	1765 x 700 x 824 mm
Electrical Supply	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz	230V, 50Hz 220V, 60Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	50Hz: 3.84 kWh 60Hz: 4.05 kWh	50Hz: 9.23 kWh 60Hz: 10.75 kWh	50Hz: 4.52 kWh 60Hz: 2.66 kWh	50Hz: 4.52 kWh 60Hz: 2.66 kWh
Weight Gross/Net (incl. castors)	140/119 kg	140/119 kg	205/178 kg	205/178 kg
Drawer External Dimensions W x H. GN compatible	–	–	445 x 304 mm	445 x 195 mm
Shelf Dimensions (W x D)	325 x 522 mm (6 supplied, 2 per section)	325 x 522 mm (6 supplied, 2 per section)	–	–
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	–	–
Shelf Fittings	GN Rails as standard, 1/1 GN Deep	GN Rails as standard, 1/1 GN Deep	–	–
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	50Hz: 350W 60Hz: 370W	50Hz: 610W 60Hz: 600W	50Hz: 308W 60Hz: 380W	50Hz: 308W 60Hz: 380W
Refrigerant	R134a	R404A	R134a	R134a
LED Light	Optional = Model LS4-GN	Optional = Model LS4-GN	Not Applicable	Not Applicable
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional	Optional
Drawer/Door Combination	–	–	RTDW-187MS4-D22 (€ 3.370) RTDW-187MS4-22D (€ 3.370)	RTDW-187MS4-D33 (€ 3.795) RTDW-187MS4-33D (€ 3.795)
Door lock	Standard	Standard	Optional	Optional

Refrigerated Undercounter Storage



RTW-120MS4



FTW-120MS4



RTW-126MS4



RTW-126LS4-GD

PRODUCT NAME	RTW-120MS4	FTW-120MS4	RTW-126MS4	RTW-126LS4-GD
Item Code	W86120001	W86220001	W86120002	W86120101
Temperature Range	-2/+12 °C	-23/-7 °C	-2/+12 °C	-2/+12 °C
PRICE	€1.935,00	€2.415,00	€1.935,00	€2.230,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	RTW-120MS4	FTW-120MS4	RTW-126MS4	RTW-126LS4-GD
Internal Volume (gross)	306 Ltr	306 Ltr	233 Ltr	233 Ltr
Internal Volume (net)	296 Ltr	296 Ltr	223 Ltr	223 Ltr
Dimensions (W x D x H)	1200 x 750 x 824 mm	1200 x 750 x 824 mm	1200 x 600 x 824 mm	1200 x 600 x 824 mm
Electrical Supply	230V, 50Hz	230V, 50Hz	230V, 50Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	3.23 kWh	9.23 kWh	3.23 kWh	3.77 kWh
Weight Gross/Net (incl. castors)	120/102 kg	120/102 kg	106/91 kg	106/91 kg
Shelf Dimensions (W x D)	385 x 560 mm (4 supplied, 2 per section)	385 x 560 mm (4 supplied, 2 per section)	385 x 410 mm (4 supplied, 2 per section)	385 x 410 mm (4 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Shelf Fittings	Clips as standard	Clips as standard	Clips as standard	Clips as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	280W	610W	280W	280W
Refrigerant	R134a	R404A	R134a	R134a
LED Light	Optional = Model LS4	Optional = Model LS4	Optional = Model LS4	Standard
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional	Optional
Door lock	Standard	Standard	Standard	Standard

*): Information not yet available

Refrigerated Undercounter Storage



FTW-126MS4



RTW-150MS4



FTW-150MS4

PRODUCT NAME	FTW-126MS4	RTW-150MS4	FTW-150MS4
Item Code	W86220002	W86120003	W86220003
Temperature Range	-23/-7°C	-2/+12°C	-23/-7°C
PRICE	€2.415,00	€2.095,00	€2.505,00
MATERIAL			
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	FTW-126MS4	RTW-150MS4	FTW-150MS4
Internal Volume (gross)	233 Ltr	418 Ltr	418 Ltr
Internal Volume (net)	223 Ltr	408 Ltr	408 Ltr
Dimensions (W x D x H) (Incl. Castors 124 mm)	1200 x 600 x 824 mm	1500 x 750 x 824 mm	1500 x 750 x 824 mm
Electrical Supply	230V, 50Hz	230V, 50Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	9.23 kWh	3.84 kWh	9.23 kWh
Weight Gross/Net (incl. castors)	106/91 kg	140/116 kg	142/118 kg
Shelf Dimensions (W x D)	385 x 410 mm (4 supplied, 2 per section)	535 x 560 mm (4 supplied, 2 per section)	535 x 560 mm (4 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Shelf Fittings	Clips as standard	Clips as standard	Clips as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	610W	350W	610W
Refrigerant	R404A	R134a	R404A
LED Light	Optional = Model LS4	Optional = Model LS4	Optional = Model LS4
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional
Door lock	Standard	Standard	Standard

Refrigerated Undercounter Storage



RTW-156MS4



RTW-156LS4-GD



FTW-156MS4



RTW-180MS4

PRODUCT NAME	RTW-156MS4	RTW-156LS4-GD	FTW-156MS4	RTW-180MS4
Item Code	W86120004	W86120102	W86220004	W86120005
Temperature Range	-2/+12 °C	-2/+12 °C	-23/-7 °C	-2/+12 °C
PRICE	€2.095,00	€2.600,00	€2.505,00	€2.440,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	RTW-156MS4	RTW-156LS4-GD	FTW-156MS4	RTW-180MS4
Internal Volume (gross)	318 Ltr	318 Ltr	318 Ltr	526 Ltr
Internal Volume (net)	308 Ltr	308 Ltr	308 Ltr	512 Ltr
Dimensions (W x D x H)	1500 x 600 x 824 mm	1500 x 600 x 824 mm	1500 x 600 x 824 mm	1800 x 750 x 824 mm
Electrical Supply	230V, 50Hz	230V, 50Hz	230V, 50Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	3.23 kWh	3.77 kWh	9.23 kWh	3.84 kWh
Weight Gross/Net (incl. castors)	126/106 kg	126/106 kg	124/104 kg	154/127 kg
Shelf Dimensions (W x D)	535 x 410 mm (4 supplied, 2 per section)	535 x 410 mm (4 supplied, 2 per section)	535 x 410 mm (4 supplied, 2 per section)	4 pcs 442 x 560 mm 2 pcs 488 x 560 mm (6 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Shelf Fittings	Clips as standard	Clips as standard	Clips as standard	Clips as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	280W	280W	610W	350W
Refrigerant	R134a	R134a	R404A	R134a
LED Light	Optional = Model LS4	Standard	Optional = Model 156LS4	Optional = Model LS4
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional	Optional
Door lock	Standard	Standard	Standard	Standard

*): Information not yet available

Refrigerated Undercounter Storage



FTW-180MS4



RTW-186MS4



RTW-186LS4-GD



FTW-186MS4

PRODUCT NAME	FTW-180MS4	RTW-186MS4	RTW-186LS4-GD	FTW-186MS4
Item Code	W86220005	W86120006	W86120103	W86220006
Temperature Range	-23/-7°C	-2/+12°C	-2/+12°C	-23/-7°C
PRICE	€2.900,00	€2.440,00	€2.990,00	€2.900,00
MATERIAL				
Interior/Exterior	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430	Stainless Steel SS 430

TECHNICAL DATA	FTW-180MS4	RTW-186MS4	RTW-186LS4-GD	FTW-186MS4
Internal Volume (gross)	526 Ltr	400 Ltr	400 Ltr	400 Ltr
Internal Volume (net)	512 Ltr	386 Ltr	386 Ltr	386 Ltr
Dimensions (W x D x H) (Incl. Castors 124 mm)	1800 x 750 x 824 mm	1800 x 600 x 824 mm	1800 x 600 x 824 mm	1800 x 600 x 824 mm
Electrical Supply	230V, 50Hz	230V, 50Hz	230V, 50Hz	230V, 50Hz
Energy Consumption (kWh/24h) at 32.2°C ambient and 65% RH	9.23 kWh	3.84 kWh	4.70 kWh	9.23 kWh
Weight Gross/Net (incl. castors)	160/133 kg	138/115 kg	138/115 kg	138/115 kg
Shelf Dimensions (W x D)	4 pcs 442 x 560 mm 2 pcs 488 x 560 mm (6 supplied, 2 per section)	4 pcs 442 x 410 mm 2 pcs 488 x 410 mm (6 supplied, 2 per section)	4 pcs 442 x 410 mm 2 pcs 488 x 410 mm (6 supplied, 2 per section)	4 pcs 442 x 410 mm 2 pcs 488 x 410 mm (6 supplied, 2 per section)
Shelf Finishes	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)	White (Standard), Stainless Steel (Optional)
Shelf Fittings	Clips as standard	Clips as standard	Clips as standard	Clips as standard
Climate Class	5 (Tropical)	5 (Tropical)	5 (Tropical)	5 (Tropical)
Connection Load	610W	350W	350W	610W
Refrigerant	R404A	R134a	R134a	R404A
LED Light	Optional = Model LS4	Optional = Model LS4	Standard	Optional = Model LS4
Legs (optional)	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm	Adjustable 150-170 mm
Splash Back (50/100/150 mm)	Optional	Optional	Optional	Optional
Door lock	Standard	Standard	Standard	Standard

ROX - WATER ELECTROLYSERS

**2 YEARS
WARRANTY**
PARTS ONLY
EX-WORKS

SANITISE - DISINFECT - DEGREASE

On-site electrolysed water generation systems that provide a continuous flow of disinfectant and sanitiser (WOX), in combination with a multi-purpose cleaning solution (ROX) .

Sustainable & Economical Sanitary Management

Sanitizer Disinfectant

approx. 1.0 ~ 2.1m³/day

Detergent Degreaser

approx. 1.0 ~ 2.1m³/day

ROX produces specialized alkaline & acidic electrolyzed water that can be used to degrease and sanitize food preparation surfaces, kitchen equipment & utensils, as much as to disinfect foodstuff.

Completely safe to use, requires no rinsing and does not harm skin, nose, mouth, eye or any other human tissues.

WOX concentrates on producing specialized acidic electrolyzed water. Disinfect foodstuff, body parts; sanitize kitchen preparation surfaces or utensils replacing volatile, toxic chemicals. A safe and environmentally sustainable alternative for all sanitation requirements, available at a fraction of the cost.

Simple functions for easy operation & installation.

Convenient & safe sanitary management.

Compact sleek design

Sanitary touch-less operation

Environmentally friendly & economical to operate

INSTALLATION EXAMPLE



Salt water tank

SANITARY TOUCHLESS OPERATION

No contact required to operate. Built-in touchless sensor activates & dispenses electrolyzed water when Operator hand approaches.





COMPACT BODY SIZE

Compact & sleek design.
Minimal space required for installation.



COMPACT & POWERFUL

Max 4L/min capacity

Compact & powerful dispensing.
Max 4L/min is available with "HI" mode.

ENVIRONMENTALLY FRIENDLY & ECONOMICAL

Minimized alkaline water production, with focus on acidic electrolysed water only.

ROX-10WB3-EW

ITEM	X003-D003
POWER SUPPLY	220-240V 50/60Hz 0.6kVA
ELECTRIC CONSUMPTION	170W
OUTSIDE DIMENSIONS (mm)	350 x 174 x 340
CRATED DIMENSIONS (mm)	610 x 250 x 452
WEIGHT Net/Gross (kg)	13/16
EURO	8.355,00

ROX-20TB2-EW

ITEM	X002-D005
POWER SUPPLY	220-240V 50/60Hz 0.6kVA
ELECTRIC CONSUMPTION	170W
OUTSIDE DIMENSIONS (mm)	280 x 400 x 310
CRATED DIMENSIONS (mm)	380 x 480 x 550
WEIGHT Net/Gross (kg)	22/28
EURO	14.595,00

Sanitizing water reference performance

Production rate setting	Hi	Mid	Lo
Production rate (L/min)	1.5	1.0	0.7
pH	3.0	3.0	3.0
Available chlorine (mg/kg)	30	40	50



GENERAL CONDITIONS OF DELIVERY OF HOSHIZAKI EUROPE B.V.

1 Definitions

- 1.1. In these general conditions, the terms below are defined as follows:

Agreement: The agreement concerning the sale of Products by Hoshizaki and the purchase of Products by the Buyer.

Buyer: The person who purchases the Products under the Agreement.

General Conditions of Delivery: The present general conditions of delivery of Hoshizaki Nederland Europe B.V.

Hoshizaki: Hoshizaki Europe B.V., a company incorporated in the Netherlands with its registered offices in at Burgemeester Stramanweg 101, NL – 1101 AA Amsterdam, the Netherlands and its principal place of business in (1101 GC) Amsterdam, the Netherlands at Burgemeester Stramanweg 101, and with a registered UK establishment (number BR002790) known as Hoshizaki UK whose address is 2 The Technology Centre London Road, Swanley, BR8 7AG.

INCOTERMS: The Incoterms 2010 rules.

Intellectual Property Rights: Patents, rights to inventions; copyright and neighbouring and related rights, all other rights in the nature of copyright; trade marks; domain names; rights in get-up; goodwill and the right to sue for passing-off; rights in designs; database rights; and all other intellectual property rights, in each case whether registered or unregistered.

2 Applicability

- 2.1. These General Conditions of Delivery apply to and are incorporated into all quotations and offers made by Hoshizaki, and each acceptance, confirmation and validation by Hoshizaki of the orders placed by the Buyer and all "Agreements" unless and in so far as otherwise is expressly agreed in writing signed by Hoshizaki.
- 2.2. Any conditions and provisions that are stated in any documents that the Buyer issues before or after Hoshizaki issues any document in which the present General Conditions of Delivery are set out or are referred to are expressly rejected by Hoshizaki and set aside. The conditions concerned do not apply to any sale made to the Buyer by Hoshizaki and are in no way whatever binding on Hoshizaki.

3 Offers/Agreements

- 3.1. All quotations issued by Hoshizaki are non-binding invitations to the Buyer to place an order. Any order placed by a Buyer is an offer to purchase the relevant Products on these General Conditions of Delivery. An Agreement is concluded if Hoshizaki accepts the order in writing or Hoshizaki commences fulfilment of the order.
- 3.2. Changes made to an Agreement are binding on Hoshizaki only in so far as Hoshizaki accepts these changes in writing or in so far as Hoshizaki has actually begun implementing the changed Agreement.
- 3.3. Hoshizaki is entitled to refuse orders or to set certain conditions for the delivery of Products unless otherwise is expressly determined.

4 Prices/Payments

- 4.1. Unless otherwise stated, the prices of Hoshizaki are given in euros. If prices are given in another currency, then Hoshizaki may increase the price charged to reflect any change in the euro exchange rate between the date that the Agreement is made and the date that Hoshizaki submits its invoice.

- 4.2. All prices exclude VAT, duties and any other comparable levies that are imposed in connection with the sale of Products (unless otherwise is expressly stated) and the Buyer shall pay such sums in addition to the price.

- 4.3. All prices that are stated on price lists, in catalogues, quotations or other statements or listings of Hoshizaki are based on delivery in accordance with the INCOTERMS applicable under clause 5 may invoice the Buyer.

- 4.4. Unless agreed otherwise in writing between Hoshizaki and the Buyer, Hoshizaki may invoice the Buyer for any additional cost payable by the Buyer under the applicable INCOTERMS.

- 4.5. The Buyer shall pay Hoshizaki's invoices within thirty (30) days after the invoice date, unless otherwise agreed in writing between Hoshizaki and the Buyer.

- 4.6. All payments shall be made into the account nominated by Hoshizaki from time to time.

- 4.7. If deliveries are made in instalments, each instalment may be invoiced separately. No discount shall be given for early payment, unless Hoshizaki consents to such a discount in writing.

- 4.8. In addition to all other legal rights and remedies that Hoshizaki might have, interest shall be charged, as permitted by law, on all overdue payments at a rate of eighteen per cent (18%) annually or – if it is higher – at the statutory interest rate from the date payment falls due to the date on which payment is made in full.

- 4.9. In addition to the amount due, increased by the interest charged in accordance with Clause 4.8, the Buyer shall reimburse Hoshizaki for all costs and expenses that Hoshizaki incurs or suffers as a consequence of the non-payment or late payment on the part of the Buyer, including all costs of any debt recovery or enforcement action that Hoshizaki may take against the Buyer.

- 4.10. If Hoshizaki reasonably considers, including (without limitation) as a result of a change in the Buyer's credit rating with any reputable credit reference agency, that the financial situation of the Buyer is at any time such that it would not be sensible to start or continue production or delivery of Products on the basis of the aforementioned payment conditions, then Hoshizaki may require full or partial payment in advance or require other payment conditions as a condition for production or delivery of the Products.

- 4.11. If the Buyer fails to pay on the date they fall due any sums owed to Hoshizaki under the Agreement or otherwise, or if the Buyer is otherwise in default of its obligations under the Agreement:

- 4.11.1. Hoshizaki may suspend delivery of Products until the Buyer has paid the amounts due in full and has remedies any other default; and

- 4.11.2. Hoshizaki may require payment in advance for any future deliveries.

- 4.12. The rights in Clause 4.11 are in addition to and not instead of any other rights and legal remedies which apply or which are available by virtue of the Agreement or the law.

5 Deliveries

- 5.1. Delivery of Products shall take place Ex-Works (EXW), (INCOTERMS), unless:

- 5.1.1. the Buyer is established in one of the following countries, in which case the delivery of Products shall take place Carriage and Insurance Paid To (CIP) (INCOTERMS): the Netherlands, Belgium, Luxembourg, Great Britain, Ireland,

France, Germany, Austria, Switzerland, Spain or Portugal; or

- 5.1.2. the parties agree otherwise in writing.

- 5.2. Hoshizaki is entitled to deliver Products in stages (partial deliveries).

- 5.3. The dates of delivery given or confirmed by Hoshizaki are only approximate dates. Hoshizaki shall use reasonable endeavours to make delivery on those dates or within a reasonable period before or after those dates, provided that the Buyer provides all necessary order and delivery data within a reasonable period before the delivery date concerned.

- 5.4. The Buyer shall inform Hoshizaki in writing if the delivery has not taken place and shall give Hoshizaki a period of thirty (30) days to make delivery. If Hoshizaki does not deliver those Products within this period of thirty (30) days, then the Buyer may, as the only and exclusive legal remedy, cancel its order to the extent only that it relates to those Products.

- 5.5. Title in the Products is transferred to the Buyer in accordance with the provisions in Clause 7.1. The risk in the Products is transferred to the Buyer in accordance with the applicable INCOTERMS.

- 5.6. If the Buyer does not take delivery of the Products in accordance with the applicable INCOTERMS, then Hoshizaki may store the Products and if Hoshizaki does so, the Buyer shall pay to Hoshizaki as a debt on demand Hoshizaki's costs in doing so.

6 Returns

- 6.1. The Buyer may refuse to accept the Products when the Products arrive at the named place of destination if the Products are delivered CIP INCOTERMS, or when Hoshizaki delivers them at the named place of delivery if the Products are delivered EXW INCOTERMS, provided that:
- 6.1.1. the Buyer shall inform Hoshizaki of the refusal immediately;
- 6.1.2. the Buyer shall pay Hoshizaki a failed delivery fee, at Hoshizaki's then current rate for such charges.

- 6.2. The right of refusal in Clause 6.1 does not apply to any Products that have been designed or manufactured specially to the Buyer's own requirements.

- 6.3. This clause 6 shall not affect the Buyer's remedies for a breach by Hoshizaki of the warranty at clause 9 or any other provision of the Agreement.

7 Retention of Title

- 7.1. Title in the Products remains vested in Hoshizaki until the moment that all sums payable by the Buyer to Hoshizaki under the relevant Agreement are received by Hoshizaki in cash or cleared funds.

- 7.2. Until title in the Products passes to the Buyer, the Buyer shall:

- 7.2.1. store the Products separately from all other Products held by the Buyer so that they remain readily identifiable as Hoshizaki's property;

- 7.2.2. not remove, deface or obscure any identifying mark or packaging on or relating to the Products;

- 7.2.3. maintain the Products in satisfactory condition and keep them insured against all risks for their full price from the date of delivery;

- 7.2.4. notify Hoshizaki immediately if the Buyer becomes subject to any of the events listed in Clauses to 15.1.4; and

- 7.2.5. give Hoshizaki such information relating to the Products as Hoshizaki may require from time to time.

- 7.3. Subject to Clause 7.4, the Buyer may resell or use the Products in the ordinary course of its business (but not



GENERAL CONDITIONS OF DELIVERY OF HOSHIZAKI EUROPE B.V.

otherwise) before Hoshizaki receives payment for the Products. However, if the Buyer resells the Products before that time:

- 7.3.1. it does so as principal and not as Hoshizaki's agent; and
- 7.3.2. title to the Products shall pass from Hoshizaki to the Buyer immediately before the time at which resale by the Buyer occurs.

- 7.4. If before title to the Products passes to the Buyer the Buyer becomes subject to any of the events listed in Clauses 15.1.2 to 15.1.4, then, without limiting any other right or remedy Hoshizaki may have:
 - 7.4.1. the Buyer's right to resell the Products or use them in the ordinary course of its business ceases immediately
 - 7.4.2. Hoshizaki may at any time require the Buyer to deliver up all Products in its possession that have not been resold, or irrevocably incorporated into another product; and
 - 7.4.3. if the Buyer fails to do so promptly, enter any premises of the Buyer or of any third party where the Products are stored in order to recover them.

8 Force Majeure

- 8.1. Hoshizaki is not liable for any failure to perform or any delay in performing its obligations under an Agreement if:
 - 8.1.1. the failure or the delay is the result of interruptions in the production process of the Products; or
 - 8.1.2. the failure or the delay is the result of Force Majeure Event.
- 8.2. If the period of delay or non-performance referred to in clause 8.1 last for a consecutive period of three months, or if Hoshizaki reasonably expects it to last for a period of three or more consecutive months, then Hoshizaki may terminate the Agreement without liability to the Buyer resulting from such termination.
- 8.3. If, when a Force Majeure Event arises, Hoshizaki has already fulfilled some of its obligations ensuing from the Agreement, then Hoshizaki may invoice for the actions already performed separately and the Buyer is required to pay this invoice.

9 Product Warranty

- 9.1. Hoshizaki warrants that, under normal use in accordance with the accompanying user's manual, that at the time of delivery to the Buyer and for twenty-four (24) months from the delivery date (or another period that the parties might have agreed to in writing) the Products shall be free from material defects and shall substantially conform with the specifications of Hoshizaki for the Product concerned or, if applicable, other specifications to which Hoshizaki has consented in writing.
- 9.2. The only obligation of Hoshizaki and the only remedy of the Buyer in connection with claims ensuing from the warranty at Clause 1 is limited, at the discretion of Hoshizaki, either to the replacement or repair by Hoshizaki (or by a distributor/dealer appointed by it or a recognized and qualified maintenance service) of a defective Product or a Product that does not meet the specifications, or to the reimbursement of the purchase price of the Product. Hoshizaki shall be granted a reasonable period of time for the repair, replacement or allocation of a reimbursement. The Products that do not meet the specifications or defective Products shall become the property of Hoshizaki as soon as they are replaced or reimbursement has been awarded for such.
- 9.3. Notwithstanding the previous Clause 9.2, Hoshizaki has no obligations on the basis of the warranty at clause 8.1 if the asserted defect or the non-fulfilment of the specifications can be ascribed to power failures or the incorrect connection of the Product to the elec-

tricity grid, the incorrect connection of or defects in the water supply or drainage to and from the Product, respectively, tests conducted under circumstances of special use, incorrect use, use in another manner than is described in the user's manual, insufficient care, faulty installation or an accident, or to faulty repair, adaptations or changes or storage, or incorrect transport, or incorrect handling, cleaning or maintenance of the Product.

- 9.4. The warranty in Clause 9.1 is given directly to the Buyer and not to the Buyer's customers.
- 9.5. To the fullest extent permitted by law, any warranties not set out in these General Conditions of Delivery (including, without limitation, the warranties implied by sections 13 to 15 of the Sale of Goods Act 1979) are excluded. The Buyer agrees and acknowledges that it has not relied on and shall have no remedies in respect of any warranties or representations not set out in these General Conditions of Delivery (provided that nothing in the Agreement shall limit or exclude Hoshizaki's liability for fraud).

10 Liability

- 10.1. Hoshizaki shall have no liability arising out of or in connection with the Agreement, whether in contract, tort (including negligence), breach of statutory duty or otherwise for:
 - 10.1.1. lost profit or revenue;
 - 10.1.2. lost savings;
 - 10.1.3. loss of reputation;
 - 10.1.4. loss of goodwill;
 - 10.1.5. damages of an indirect, special, or consequential nature; or
 - 10.1.6. damages imposed as a fine.
- 10.2. The aggregate liability of Hoshizaki towards the Buyer arising out of or in connection with the Agreement, whether in contract, tort (including negligence), breach of statutory duty or otherwise is shall not exceed an amount equal to the price paid to Hoshizaki by the Buyer under the Agreement in the twelve months prior to the event giving rise to the first claim by the Buyer.
- 10.3. Any claim by the Buyer shall be notified to Hoshizaki in writing by the Buyer setting out full particulars within thirty (30) days after the date of the first event which is the basis of the claim. Any legal proceedings related to such a claim must be issued within one (1) year after the date of the first event which is the basis of the claim. The Buyer shall be deemed to waive any claims in respect of which it does not comply with this Clause 10.3.
- 10.4. Notwithstanding anything to the contrary in these General Conditions of Delivery, nothing in the Agreement shall limit or exclude Hoshizaki's liability for:
 - 10.4.1. death or personal injury caused by Hoshizaki's negligence;
 - 10.4.2. Hoshizaki's fraud or fraudulent misrepresentation;
 - 10.4.3. any other liability that cannot be so limited or excluded by law.

11 Intellectual Property Rights

- 11.1. Upon delivery of Products to the Buyer, Hoshizaki grants to the Buyer, a non-exclusive and non-transferable limited licence to use and to resell those Products, provided that the Buyer shall not without the prior written agreement of Hoshizaki modify, adapt, reverse-engineer, or reproduce the Products.
- 11.2. Nothing in the Agreement shall affect the ownership of any Intellectual Property Rights in the Products.
- 11.3. Hoshizaki shall, at its own cost: (i) conduct the legal defence if a third party institutes legal proceedings against the Buyer, in so far as these legal proceedings involve a claim asserting that any Product delivered

by Hoshizaki under an Agreement directly infringes upon the Intellectual Property Rights of the claimant; and (ii) indemnify the Buyer against the payment of damages and costs that are imposed in the final judgement in such legal proceedings, in so far as this judgement can be directly and exclusively ascribed to the infringement in question. Hoshizaki's liabilities under this Clause 11.3 are subject to Clause 10.2.

- 11.4. Hoshizaki shall have no obligation or liability towards the Buyer under Clause 11.3 if:
 - 11.4.1. Hoshizaki is not: (i) informed immediately in writing of a claim to which Clause 11.3 applies; (ii) given the exclusive right to take control of and organise the research, the preparations, the defence and the settlement in the context of such a claim, including the selection of legal counsel; and (iii) is not given full support and cooperation on the part of the Buyer in the context of the research, the preparations, the defence and the settlement as mentioned above; or if
 - 11.4.2. the action is instituted after the expiry of a period of three (3) years after the date of delivery of the Product.

- 11.5. If, in respect of a Product, legal action is instituted citing infringement of the sort referred to in Clause 11.3, or if, in the opinion of Hoshizaki, such legal action is likely to occur, then Hoshizaki may at its sole discretion
 - 11.5.1. obtain the right for the Buyer to use and resell the Product;
 - 11.5.2. replace the Product;
 - 11.5.3. to adapt the Product in such a manner that, in its new form, the Product no longer makes any infringement or
 - 11.5.4. to terminate an Agreement in so far as this pertains to the Product in question.
- 11.6. Clauses 11.3 and 11.5 set out the Buyer's sole remedy for any actual or alleged infringement of third party Intellectual Property Rights in connection with the Agreement.

12 Confidentiality

The Buyer acknowledges that all technical, commercial and financial data that is disclosed by Hoshizaki and/or companies affiliated with it to the Buyer are a part of the confidential information of Hoshizaki and/or companies and legal entities affiliated with it. The Buyer is forbidden to disclose any of this confidential information to third parties or to use it for any other purpose than that which the parties have agreed in writing.

13 Export/Import Regulation

- 13.1. If for the delivery of Products in the context of the Agreement, an export or import licence must be granted by a government and/or any governmental body by virtue of any applicable law or regulations, or the delivery is otherwise restricted or forbidden by law or regulations governing the regulation of exports or imports, then Hoshizaki may proceed to suspend its obligations and the rights of the Buyer with respect to the delivery in question until the required licence is granted or for the duration of the relevant restriction and/or the relevant ban and Hoshizaki may terminate the Agreement without thereby incurring any obligation towards the Buyer.
- 13.2. If an end-user statement is required, Hoshizaki shall inform the Buyer of this promptly and the Buyer shall send this document to Hoshizaki at the first request for it by Hoshizaki; if an import licence is required, the Buyer shall inform Hoshizaki of this immediately and the Buyer shall send this document to Hoshizaki as soon as it is available.
- 13.3. By accepting the quotation of Hoshizaki, by entering into any Agreement and/or by accepting Products,



GENERAL CONDITIONS OF DELIVERY OF HOSHIZAKI EUROPE B.V.

the Buyer consents to refrain from any manner of using the Products and/or the documentation pertaining to them if he thereby would violate law and regulations concerning the regulation of exports or imports.

14 Assignment And Set-Off

14.1. The Buyer is not permitted to assign, change, declare a trust over or otherwise deal with any rights or obligations under the Agreement without the prior written permission of Hoshizaki.

14.2. The Buyer is not entitled to withhold or lower any payments, or to set off current and future receivables against any payments that are owed for Products which have been sold in the context of the Agreement or any other agreement that the Buyer or one of the companies affiliated with him possibly has with Hoshizaki.

14.3. The Buyer promises to pay the payments due in full without taking into consideration any claimed set-off which the Buyer claims or is claimed on his behalf.

15 Breach and Termination

15.1. Without limiting its other rights or remedies, Hoshizaki may terminate this Contract with immediate effect by giving written notice to the Buyer if:

15.1.1. the Buyer commits a material breach of any term of the Contract and (if such a breach is remediable) fails to remedy that breach within 7 days of that party being notified in writing to do so;

15.1.2. the Buyer takes any step or action in connection with its entering administration, liquidation or any composition or arrangement with its creditors, being wound up (whether voluntarily or by order of the court), having a receiver appointed to any of its assets or ceasing to carry on business or, if the step or action is taken in another jurisdiction, in connection with any analogous procedure in the relevant jurisdiction;

15.1.3. the Buyer suspends, threatens to suspend, ceases or threatens to cease to carry on all or a substantial part of its business; or

15.1.4. the Buyer's financial position deteriorates to such an extent that in Hoshizaki's opinion the Buyer's capability to adequately fulfil its obligations under the Contract has been placed in jeopardy.

15.2. On termination of the Contract for any reason the Buyer shall immediately pay to Hoshizaki all of Hoshizaki's outstanding unpaid invoices and interest.

15.3. Termination of the Contract shall not affect any of the parties' rights and remedies that have accrued as at termination, including the right to claim damages in respect of any breach of this Contract that existed at or before the date of termination.

15.4. Any provision of the Contract that expressly or by implication is intended to come into or continue in force on or after termination shall remain in full force and effect.

16 Applicable Law and Choice of Jurisdiction

16.1. The Agreement and any claims or disputes arising out of or in connection with it or its subject matter or formation (including non-contractual disputes and claims) shall be governed and construed in accordance with the laws of England and Wales.

16.2. Any claims or disputes arising out of or in connection with the Agreement or its subject matter or formation (including non-contractual disputes and claims) shall be subject to the exclusive jurisdiction of the courts of England and Wales except that Hoshizaki may make such a claim in any court of competent jurisdiction.

16.3. The United Nations Convention on the International Sale of Goods shall not apply to the Agreement.

17 Other Provisions

17.1. If, as the result of the determination of a competent court or as the result of any future action of a legislative or administrative body, one or more provisions of the present General Conditions of Delivery become invalid or unenforceable, this shall not affect the validity or the tenability of the other provisions.

17.2. If, in the last case, the determination is made that any provisions of the present General Conditions of Delivery are not legal or are unenforceable, then the provision in question shall be considered to be removed from these General Conditions of Delivery, while all the other provisions shall continue to be fully valid and in effect, and the provision that is deemed illegal or unenforceable shall be replaced by a provision to the same effect that reflects the original purpose of the provision in so far as this is legally permissible.

17.3. If one of the parties neglects to make use of any right or legal means based on the Agreement, or if use is made of the same only after some time has passed, this may not be seen as the waiver of that right or legal means, nor shall any single instance of making use of such a right or legal means fully or partially lead to the exclusion of any further or future use of the same or to the exclusion of making use of any other right or legal means based on the Agreement or any associated document or the law.

17.4. Hoshizaki is entitled at any time to change and/or to amend these General Conditions of Delivery at any time prior to entering the Agreement. Changes and/or amendments shall take effect after they have been brought to the attention of the Buyer and have no retroactive effect.

17.5. If these General Conditions of Delivery are agreed between the parties in a language other than English, then the text and the meaning of the English language General Conditions of Delivery shall nevertheless prevail.

17.6. No person who is not party to the Agreement shall have any right to enforce any term of the Agreement.

18 DATA PROTECTION CLAUSE

18.1 In accordance with GDPR regulations Hoshizaki has a privacy statement that can be found

Hoshizaki Europe BV

Export department

Burgemeester Stramanweg 101
1101 AA Amsterdam
Noord-Holland
The Netherlands

T. +31 (0)20 5650429

Email: sales@hoshizaki.nl

www.hoshizaki-europe.com

www.gram-commercial.com



HOSHIZAKI

Hoshizaki Europe BV

Export department

Burgemeester Stramanweg 101
1101 AA Amsterdam
Noord-Holland
The Netherlands


T. +31 (0)20 5650429

Email: sales@hoshizaki.nl

www.hoshizaki-europe.com

www.gram-commercial.com

Your trusted Hoshizaki dealer



@hoshizaki_gram



Hoshizaki Europe (EMENA)

Models and technical specifications may change without notice.

02/2023